



INSTALLATION INSTRUCTIONS

Accessory

FULL NOSE MASK
P/N 08P35-TM8-100A

Application

2013 INSIGHT

Publications No.

All 13251


Issue Date

SEP 2012


Put this information in the glove box with the vehicle owner's manual.

PARTS LIST

Mask
(hood section)

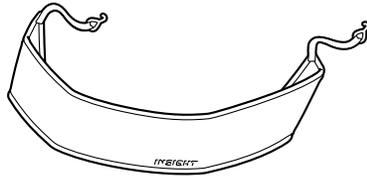

Mask
(bumper section)



2 Snap-screws




2 Washers




2 Fenderwell nuts



Elastic cord



Storage bag



TOOLS AND SUPPLIES REQUIRED

Stubby Phillips screwdriver

Utility knife

INSTALLATION


NOTE:

- Make sure the vehicle and the nose mask are clean and completely dry before installation. If the moisture under the mask is allowed to dry, it may cloud the paint. If the mask gets wet, remove it and allow it to air-dry completely.
- Make sure any repainted surfaces are cured.
- Wax the hood and nose of the vehicle with a high-quality paste wax.
- Install the nose mask securely. If the nose mask starts to flap or comes loose while driving, safely pull off the highway, stop the vehicle, and secure or remove the mask.

Displaying the License Plate


If your state law requires the display of both license plates, cut out the piece of the bumper section that covers the front license plate:

- Face the inside of the mask toward you.
- Carefully cut out the red overcast stitching with a utility knife. Remove the stitching and the license plate cover.

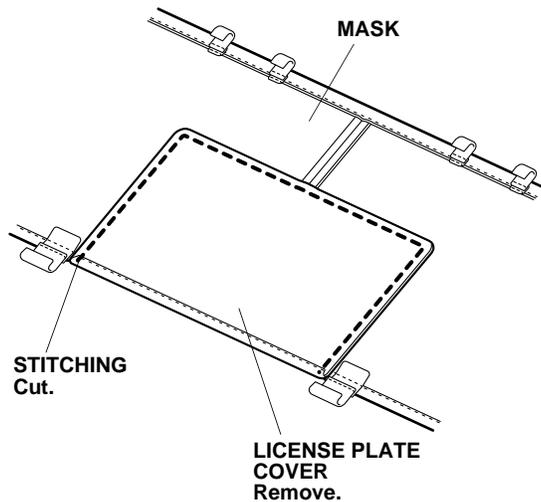


Installing the Hood Section

1. Open the hood. Fit the corners of the mask around the hood. Adjust the mask so that it fits smoothly over the edges. Attach the two hooks to the hood as shown. Remove / install the hooks by inserting your finger or thumb into the belt of each hook.

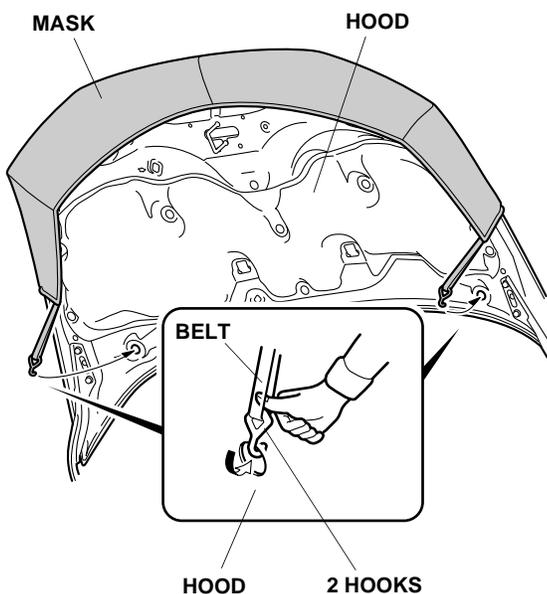


Installing the Bumper Section

2. Turn the steering wheel all the way clockwise.
3. Remove one clip from the left front inner fender.

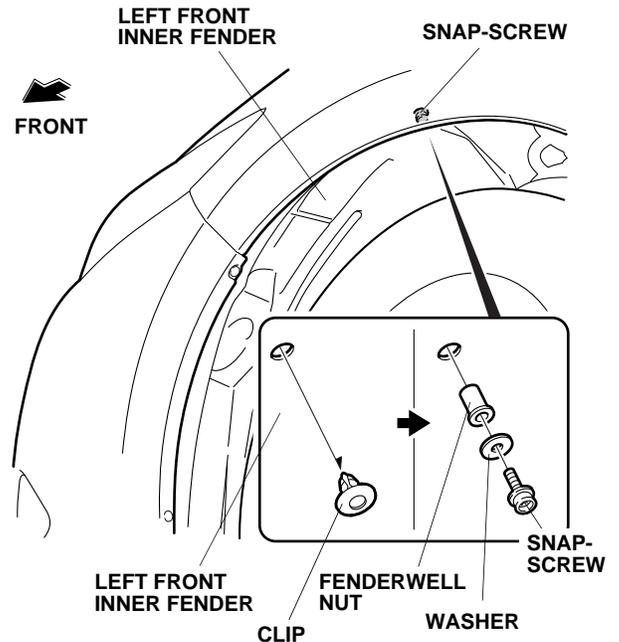


4. Attach one fenderwell nut into the left front inner fender.
5. Place a washer at the snap-screw and install the snap-screw into the fenderwell nut.

- Slip the pocket of the mask onto the front corner of the left front fender.

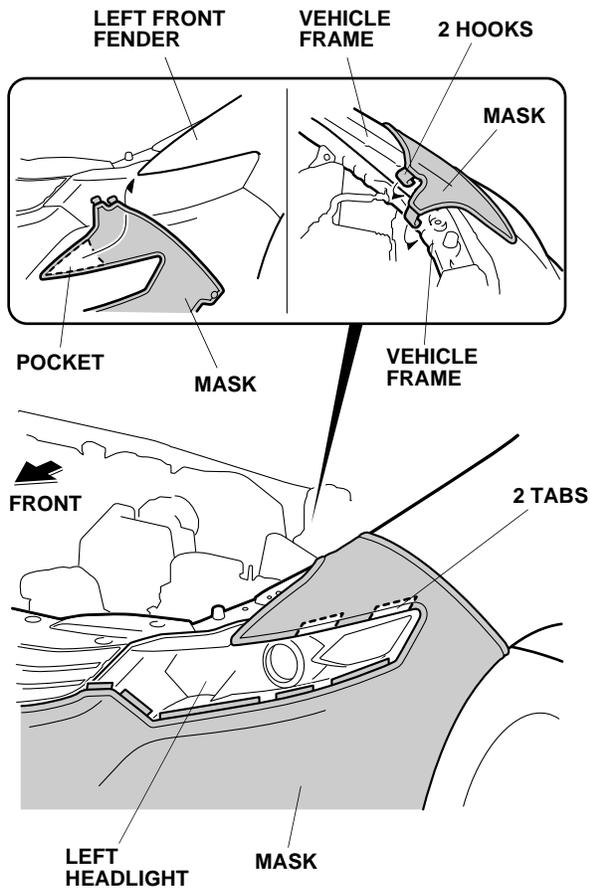


- Secure the two hooks to the vehicle frame.
- Insert the two tabs above the left headlight.

- Pull the mask back toward the fenderwell, smooth out any wrinkles, and snap the mask onto the snap-screw.

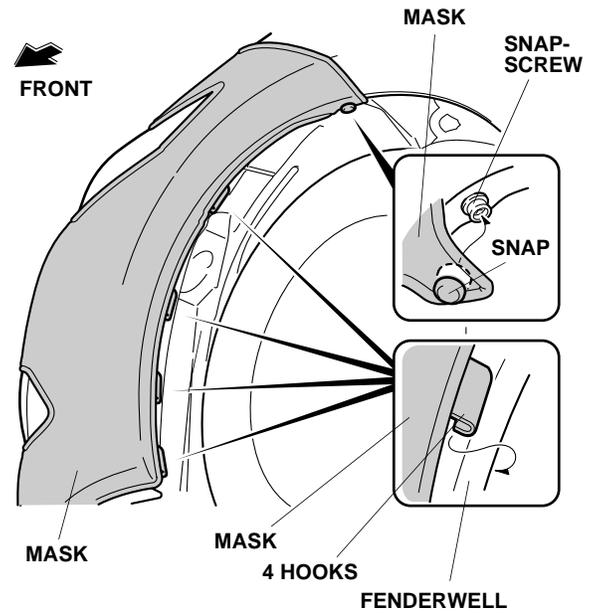


- Secure the four hooks to the fenderwell.
- Insert the five tabs below the left headlight.

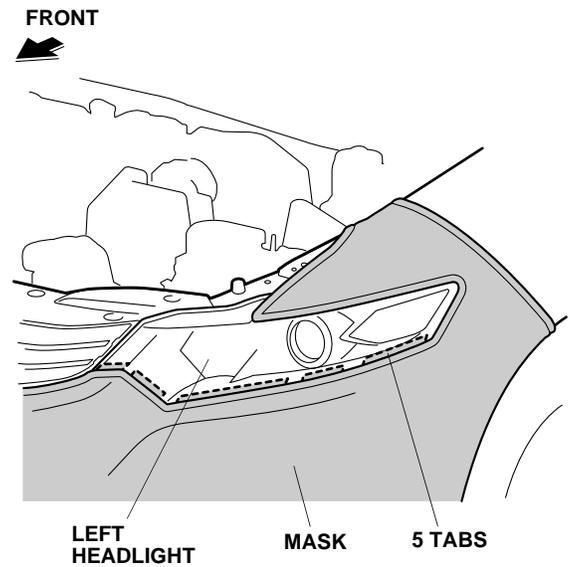


- Turn the steering wheel all the way counterclockwise, then repeat steps 3 through 11 on the right side of the vehicle.


13. Secure the four hooks to the front grille.

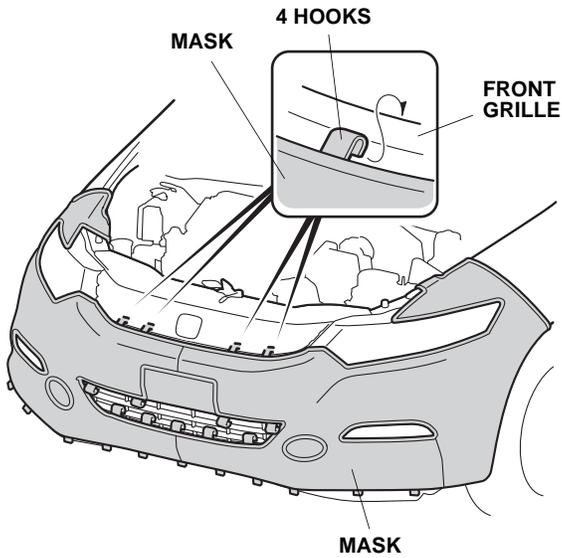

14. Secure the seven hooks to the front lower grille.

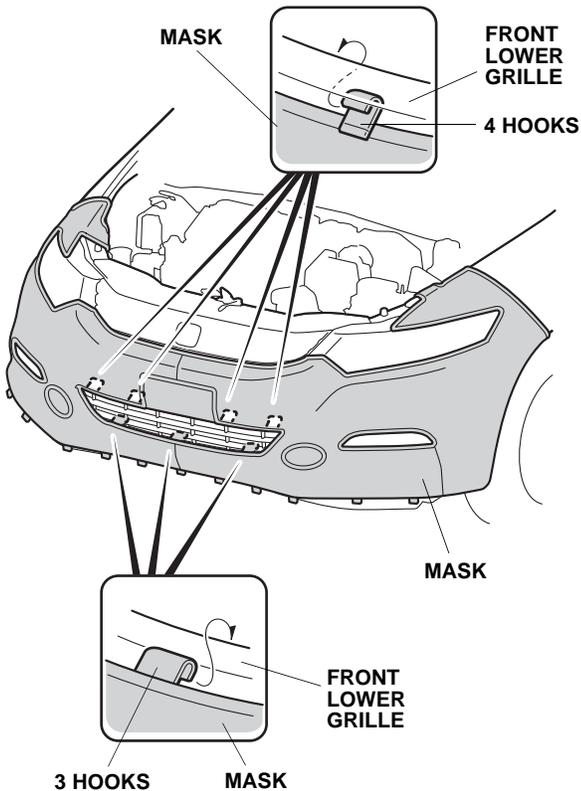

15. Route the elastic cord through the 11 loops on the bottom of the mask. Attach a hook to the hole in the bumper as shown. Attach the other hook to the hole in the bumper on the other side.

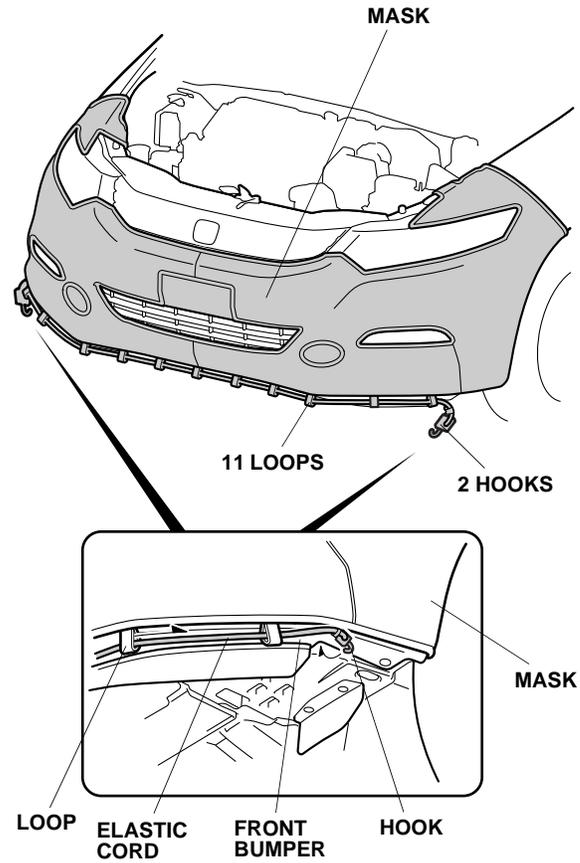

CLEANING THE NOSE MASK

Use a sponge or cloth with a solution of mild liquid dishwashing soap and water to clean the vinyl and the flannel backing. Rinse the mask completely with clean water, and hang it to dry out in direct sunlight. Make sure the mask is completely dry before you reinstall it.