




# INSTALLATION INSTRUCTIONS


Accessory	Application	Publications No.
FULL NOSE MASK P/N 08P35-T7S-100	2016 HR-V	<b>VERSION 1</b>
		Issue Date <b>APR 2015</b>

## PARTS LIST


Mask  
(hood section)




Mask  
(bumper section)



Elastic cord



Storage bag



## TOOLS AND SUPPLIES REQUIRED

Utility knife

High-quality paste wax

## INSTALLATION


### NOTE:

- Make sure the vehicle and the nose mask are clean and completely dry before installation. If moisture under the mask is allowed to dry, it may cloud the paint. If the mask gets wet, remove it and allow it to air-dry completely.
- Make sure any repainted surfaces are cured.
- Wax the hood and nose of the vehicle with a high-quality paste wax.
- Install the nose mask securely. If the nose mask starts to flap or comes loose while driving, safely pull off the highway, stop the vehicle, and secure or remove the mask.

### With Fog Lights


If the vehicle is equipped with fog lights, cut out the piece of the mask's that covers the fog lights:

- Face the inside of the bumper section toward you.
- Carefully cut out the fog light section with utility knife at the top seam, and remove the overcast stitching.

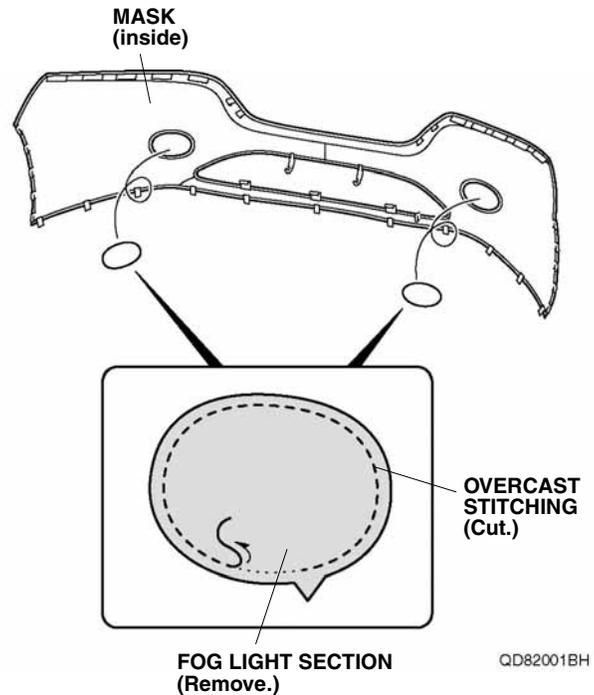


## Installing the Hood Section

1. Open the hood. Fit the corners of the mask's hood section around the hood, and adjust it so it fits smoothly over the edges. Attach the 10 S-hooks to the hood by inserting your finger into the belt of each hook.

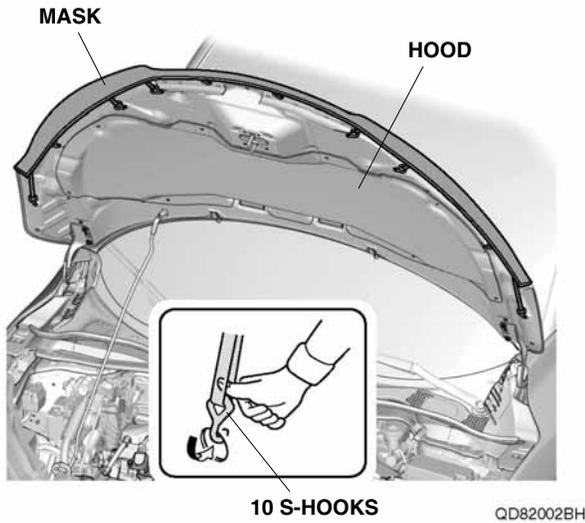


## Installing the Bumper Section

2. Pull the mask back toward the fenderwell, smooth out any wrinkles, and then attach one hook on the mask's bumper section to the edge of the left front wheel arch protector.

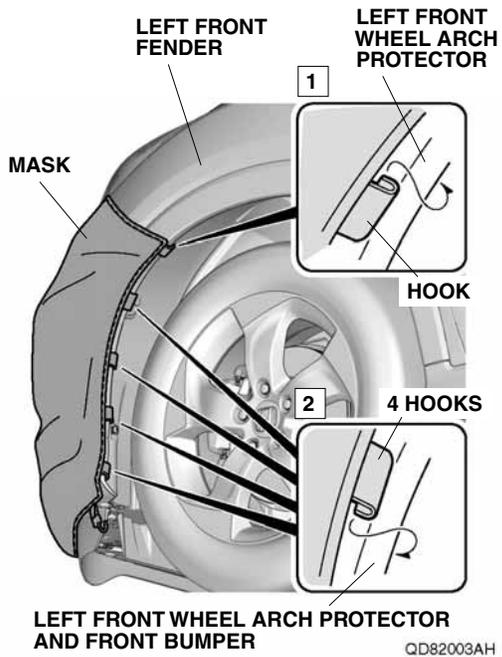


3. Attach four hooks on the mask's bumper section to the edge of the left front wheel arch protector and front bumper.


4. Attach one hook on the mask's bumper section to the edge of the front bumper.

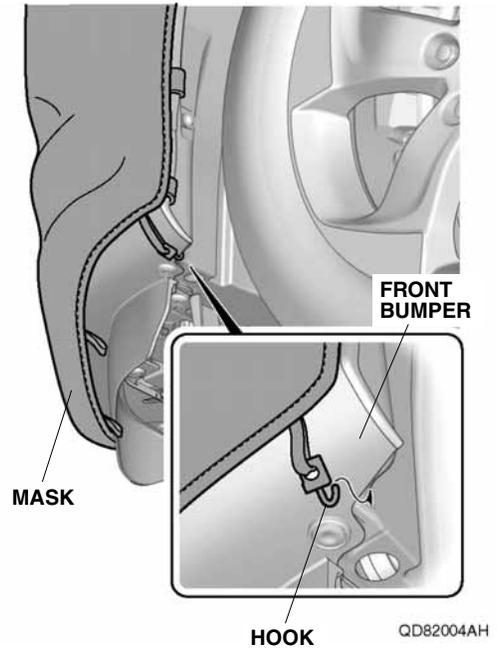


5. Repeat steps 2 through 4 on the right side.
6. On each side of the vehicle, insert the five tabs between the headlights and the front bumper.

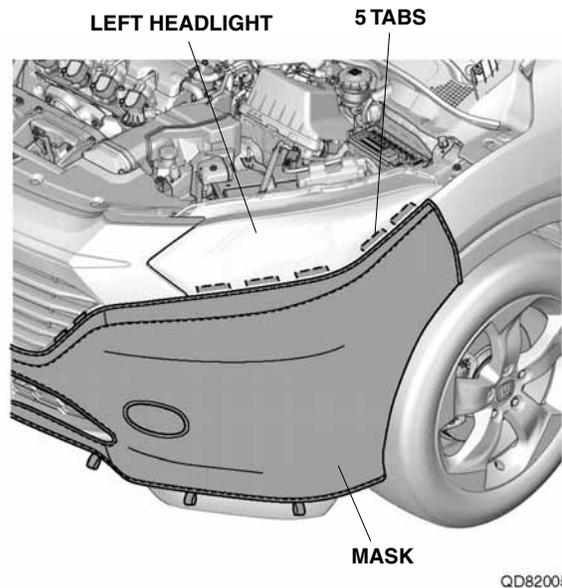

- Attach nine hooks to the inside edge of the lower grille opening and front grille opening.

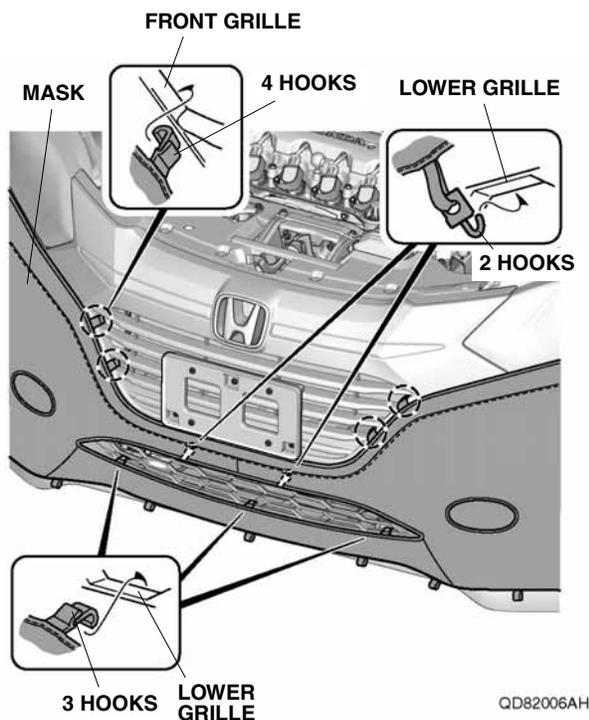

- Route the elastic cord through nine loops on the bottom of the mask's bumper section. Attach one S-hook to the bottom edge of the front bumper on one side. Then attach the other S-hook to the bottom edge of the front bumper on the other side.

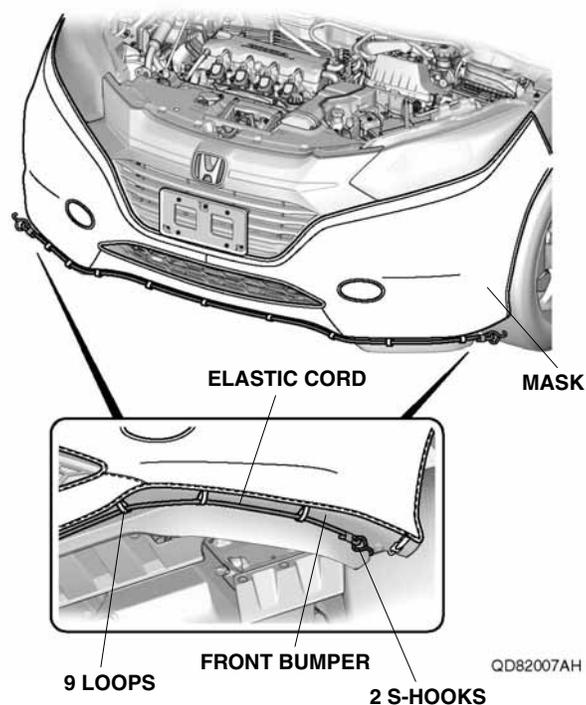

### CLEANING THE NOSE MASK

Use a sponge or cloth with a solution of mild liquid dishwashing soap and water to clean the vinyl and the flannel backing. Rinse the mask completely with clean water, and hang dry, out of direct sunlight. Make sure the mask is completely dry before you reinstall.